



Model No.: **GP476AF**

<b>Description</b>	: Mercury Free & Lead Free Alkaline High Voltage Battery
<b>Nominal Voltage</b>	: 6Volts
<b>Nominal Dimensions</b>	: Ø13.0mm×25.2mm
<b>Terminal</b>	: Nickel plated flat contacts - protruded red(+); recessed black (-)
<b>Jacket</b>	: Metal jacket
<b>Internal Connection</b>	: Pressure
<b>Applications</b>	: Electronic toy, photo
<b>Average Weight</b>	: 10g
<b>Date Code</b>	: Unless otherwise specified, each batteries will carry a numeric year code and analogue month code
<b>Shelf Life</b>	: <b>Not less than 90% of the service capacity within first year storage at 20 ± 2 °C 55 ± 20 %RH</b>
<b>Insulation</b>	: 5MΩ min.
<b>Resistance</b>	
<b>Close Circuit Voltage</b>	: 5.2 Volts (min.)(load resistor 1KΩ at 20 ± 2 °C for 0.1 to 2 seconds)
<b>Nominal Service Life</b>	: 125hrs (at 6kΩ load) (to 3.6V at 20 ± 2 °C)
<b>Average Service Capacity</b>	: 105mAh(at 6kΩ load) (to 3.6V at 20 ± 2 °C)

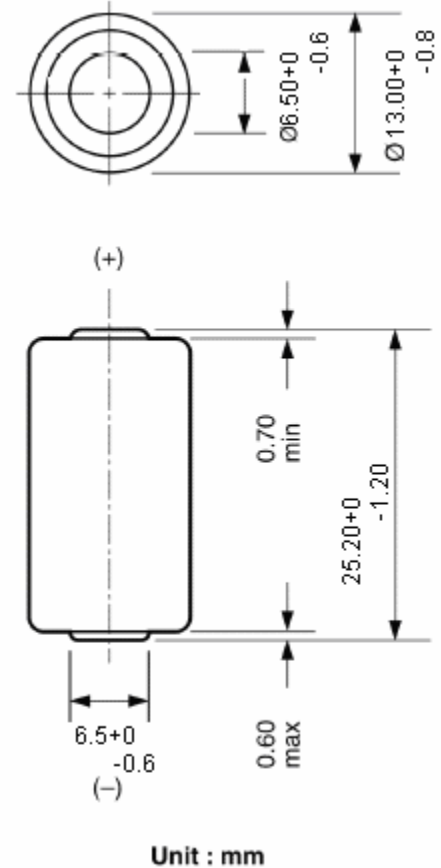

**Typical Discharge characteristics at 20 ± 2°C**

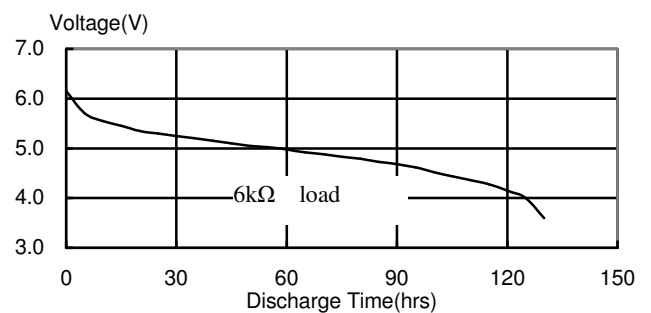

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors.